

# Beyondtech PureGigabit™ Fiber Patch Cables

BTPLCUFCU-2DC-XMXP

Beyondtech's high-quality LC to FC Fiber Patch Cable 50/125µm OM2 Multimode fiber is specially designed for fast Ethernet, Fiber Channel, Gigabit Ethernet Speeds, data center, premises, educational, commercial, LAN, SAN and Asynchronous Transfer Mode (ATM) applications. It supports video, data and voice services.

## FEATURES AND BENEFITS

- Our OM2 fiber patch cords conform conforms with TIA/EIA 492AAAA and IEC60793-2-10 A1b standards and complies with RoHS specifications.
- Our OM2 cables have a 500 MHz-km bandwidth and a 2.3dB/km maximum attenuation at 850 nm light sources and a 500 MHz-km bandwidth and a 0.6dB/km maximum attenuation at a 1300 nm wavelength.
- This multimode patch cord operate at -20°C to +70°C and have a minimum installation bending radius of 5 cm and a minimum long term bending radius of 3 cm.
- OM2 patch cords are suitable for backbone, riser and horizontal configurations. - (LC duplex connectors are joined with a plastic clip, easy to remove in case you need to separate the connectors.to separate the connectors.)



## SPECIFICATIONS

### Color Code:

Orange

### Bend Radius:

Minimum / 5cm

### Cable Jacket:

3.0mm LZSH

### Operating Temperature:

-4° to 158° F (-20° to +70° C)

### Core:

OM2 50/125umµm

### Jacket:

Standard Zip Cord Duplex

### Termination:

Connector A (LC) / Connector B (FC)

### Features:

Connectors feature dust caps on the tips for protection. LC and FC duplex assemblies are attached with easy-removable clips.



A	B	C	D	E	F	G	H	I	J	K
BT	P	LC	U	LC	U	0	D	C	1M	1P

**Example:** BTPLCULCU0DC1M1P = Beyondtech | Patch Cables | LC | UPC | to LC | UPC | OS1 | Duplex | 3.0mm PVC | 1Meter | 1 Pack

<b>A</b> Beyondtech	<b>B</b> <b>P</b> Fiber Patch Cable <b>C</b> Fiber Connectors <b>A</b> Fiber Adapters <b>AT</b> Fibre Attenuator <b>PI</b> Fiber Pigtail	<b>C</b> <b>A Connector:</b> SC / LC / ST / FC / MJ (MTRJ)
<b>D</b> <b>A Polishing:</b> <b>P</b> PC <b>U</b> UPC <b>A</b> APC	<b>E</b> <b>B Connector:</b> SC / LC / ST / FC MJ (MTRJ)	<b>F</b> <b>B Polishing:</b> <b>P</b> PC <b>U</b> UPC <b>A</b> APC
<b>G</b> <b>0</b> OS1 Single-mode 9/125µm <b>1</b> OM1 Multi-mode 62.5/125µm <b>2</b> OM2 Multi-mode 50/125µm <b>3</b> OM3 Multi-mode 50/125µm 10G <b>4</b> OM4 Multi-mode 50/125µm 100g	<b>H</b> <b>S</b> Simplex <b>D</b> Duplex	<b>I</b> <b>A</b> 0.9mm LSZH <b>B</b> 2.0mm LSZH <b>C</b> 3.0mm LSZH <b>D</b> 0.9mm PVC <b>E</b> 2.0mm PVC <b>F</b> 3.0mm PVC
<b>J</b> <b>Length:</b> Number X (M: Meters / FT: Feet)	<b>K</b> <b>Pack:</b> Number X (P: Pack)	<b>E, F:</b> In case of Fiber pigtail leave blank <b>LSZH</b> (Low Smoke Zero Halogen)  Other options are available. Ask your Beyondtech sales representative.  <b>1</b> Jacket Type (OFNG) <b>2</b> Connector Type: E2000, MTRJ, Female/Male, MTP <b>3</b> Custom cabling per request



For more information on Beyondtech Premium Warranty, visit [beyondtech.us/warranty](https://beyondtech.us/warranty)




#### DISCLAIMER

This datasheet is from authorship and exclusive property of Beyondtech. His reproduction is banned in the integral or partially without mentioning his authorship, as well as the alteration of his content or context.

#### IMPORTANT NOTICE

All statements, technical information, and recommendations related to Beyondtech products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in Beyondtech current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of Beyondtech.

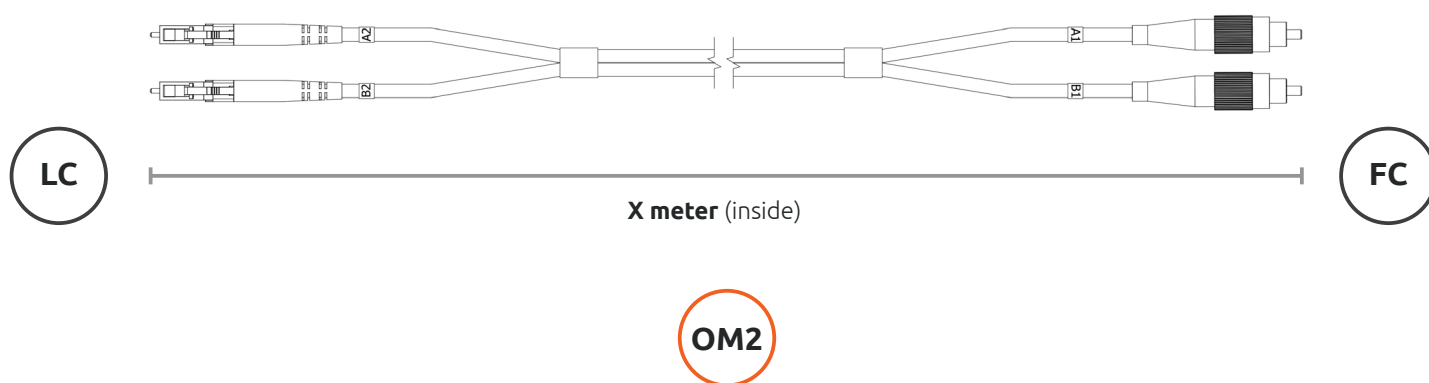

**SKU:** BTPLCUFCU-2DC-XMXP

**Name:** LC to FC Multimode Fibre Patch Cord Duplex - XM - UPC - 50/125 OM2 (LSZH) - Beyondtech Optical - PureOptics Cable Series

**Cable Jacket:** 3.0mm LZSH

**Length (ft.):** X

**Length (m):** X

**Connector type A:** LC

**Connector type B:** FC

**Color:** Orange

**Core:** OM2 50/125um

#### WORLDWIDE CORPORATE HEADQUARTERS

Rediret UK LTD.  
London UK.  
info@rediret.com  
+44 (020) 3289.1190

Beyondtech Europe  
Madrid, ES  
info@beyondtech.es  
+34 (747) 869.449

Beyondtech Americas  
Miami, FL, USA  
info@beyondtech.global  
+1 (305) 897.3507

For more information, visit our website  
[www.beyondtech.global](http://www.beyondtech.global), contact us  
at [customer@beyondtech.global](mailto:customer@beyondtech.global) or  
call **+1 (844) 283.5266** (toll-free).